

# IK42DIST32UK+

DISTRO+ FOR iK42 AND iK41 - ROW VERSION

## Features

- 2U distro used to supply power and take the output from three iK42 or iK41 amplifiers

## Front Panel

- 32A three-phase Ceeform power input
- 3 x NL8 output
- 6 x NL4 output
- LKA 32/25R FP output
- All loudspeaker channels wired in parallel across output types



## Rear Panel

- 6 x NL4 tails
- 3 x 32A powerCON tails
- 3 x IEC outputs

## Applications


- Touring and installation of Wavefront Precision series

## Contents

- 1 x IK42DIST32UK+

## Technical Specifications

WEIGHT	7kg/15.4lbs
DIMENSIONS	(H) 88mm x (W) 440mm x (D) 250mm
	(H) 3.4" x (W) 17.3" x (D) 9.8"

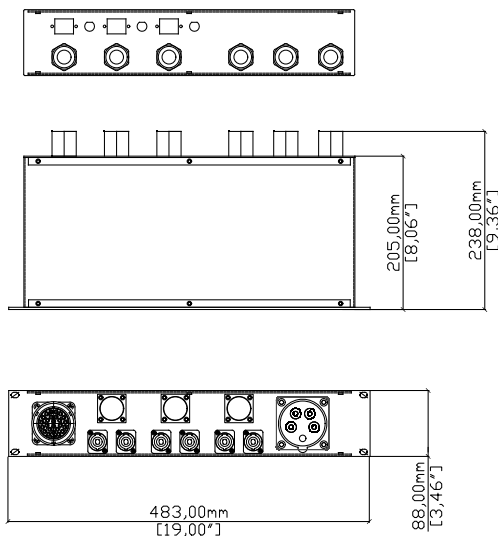

Martin Audio Ltd  
 Century Point, Halifax Road, High Wycombe  
 Buckinghamshire HP12 3SL, England

Telephone: +44 (0) 1494 535 312  
 Email: [info@martin-audio.com](mailto:info@martin-audio.com)

All information is Copyright © 2024 Martin Audio Ltd.



[www.martin-audio.com](http://www.martin-audio.com)